


# ALEMITE "PIN TYPE" SYSTEM

## For Automotive and Industrial Lubrication

### Hand Compressors


To Be Used with Flexible Hose  
1/8 Pipe Thread Connection.



C-600. Regular Compressor. Size overall is 2½ by 8 inches. Approximately capacity is ½ pound.  
**LIST EACH, \$1.80**



A-110. Piston Cup Leather  
**EACH, \$0.15**



C-700. Medium Compressor. Size overall is 3 by 9 inches. Capacity is ¾ pound .....**LIST EACH, \$3.40**



A-710. Piston Cup Leather  
**EACH, \$0.20**



1080. Large Compressor. Length, 10½ inches. Diameter cylinder is 2½ inches. Capacity is 14 ounces.  
**LIST EACH, \$3.70**

1079. With Crank Handle.  
**LIST EACH, \$4.70**

A-510. Piston Cup Leather  
**EACH, \$0.25**

**DISCOUNT .....40% OFF**

### Standard Hose

For hand compressors. For equipment with Alemite fittings. Double braided finely woven wire. Very strong and light.



A-1039. 14 inch. Special Coupling. ½ inch connection.  
**LIST EACH, \$1.45**


HP-129. 8-1/2 inch. 1/8 inch pipe thread end connection.  
**LIST EACH, \$1.20**

A-904. 24 inch. 1/8 inch pipe thread end connection.  
**LIST EACH, \$1.90**

**DISCOUNT .....40% OFF**

### Heavy Duty Hose

For any hand compressor with ¾ inch connection. For equipment with Alemite fittings. Triple braided finely woven wire inside of a conduit of heavy flexible metal.



A-908-A 15 inch .....**EACH, \$3.50**

**DISCOUNT .....40% OFF**

### Repair Parts



P-42058 G-42059 H-15-114 H-114

**EACH**


P-42058 Coupling Body .....**\$0.25**  
G-42059 Coupling Assembly ..**\$0.30**

H-15-114 Nipple Assembly,  
½ inch .....**\$0.30**  
H-114 Nipple Assembly,  
¼ inch .....**\$0.30**



A-912. Coupling Nipple. For connecting two or more lengths of hose.  
**EACH, \$0.12**

P-43809 Hose Nut ....**EACH, \$0.10**  
H-151 Swivel Stud ..**EACH, \$0.20**



P-43851 Steel Washer .....**\$0.02**  
P-46118 Coupling Cup Leather ..**\$0.04**  
A-617 Coupling Spring .....**\$0.03**  
A-618 Nipple Spring .....**\$0.03**



5329. Push Type to Pin Type Adapter. Pin type fittings can be lubricated by a push type gun.  
**EACH, \$0.75**


A-942. Spiral Valve Coupling Adapter. When the fitting is placed at an angle that does not permit access with the hose or compressor it can be reached by use of this adapter. Swivel fitting can be turned to the direction necessary.  
**LIST EACH, \$0.75**



**PRICE ..... NET**

### Coupling Kits

Couplings can easily be repaired. Leakage of lubricant from sides of coupling can be avoided by use of new leathers.



REPAIR KIT 5035. 1 RT-50 Repair Tool (.60); 6 A-617 Springs (.03 Each); 10 P-43851 Steel Washers (.02 Each); 30 P-46118 Cup Leathers (.04 Each) .....**LIST EACH KIT, \$1.80**

PARTS KIT 5541. 12 A-617 Springs (.03 Each); 20 P-43851 Steel Washers (.02 Each); 60 P-46118 Cup Leathers (.04 Each) .....**LIST EACH KIT, \$2.00**

PARTS KIT 5542. 6 A-617 Springs (.03 Each); 10 P-43851 Steel Washers (.02 Each); 30 P-46118 Cup Leathers (.04 Each) .....**LIST EACH KIT, \$1.20**

**DISCOUNT .....40% OFF**

### Alemite Fittings




A-336 A-358

A-336. 1/8 inch Pipe Thread Straight Fitting. **LIST EACH, \$0.08**  
A-358. 1/4 inch Pipe Thread Straight Fitting 1-3/32 inch long. **LIST EACH, \$0.12**

A-382. 1/8 inch FEMALE Pipe Thread Straight Fitting 1-1/32 inch long. ....**LIST EACH, \$0.12**

A-358. 1/8 inch Pipe Thread 90° Elbow Fitting .....**LIST EACH, \$0.12**

A-371. 1/4 inch Pipe Thread 90° angle fitting. 1-13/64 long body. **LIST EACH, \$0.12**



A-684 A-850 A-501

A-684. ½ inch Pipe Thread 45° Elbow Fitting ...**LIST EACH, \$0.12**

A-850. Water Pump Straight Fitting. ½ inch Pipe Thread. **LIST EACH, \$0.12**

A-501 Dust Cap .....**EACH, \$0.06**

**DISCOUNT .....40% OFF**

### Alemite Gat Gun



Gat Gun. Used in the lubrication of tight or "frozen" bearings. Capable of developing a pressure of 10,000 pounds to the square inch. With thrust rod follower. Lubrication capacity, 15 ounces.

1054 With double ball jointed hose .....**EACH, \$17.50**

5085 With snake hose **EACH, \$17.50**

1056 Less Hose, ½ inch connection. **LIST EACH, \$11.50**

1065 Less Hose, ¼ inch connection **LIST EACH, \$11.50**

### HOSE

Double Ball Jointed Hose. For use with gat gun or other hand guns.

5584. 1/8 P.T. ...**LIST EACH, \$6.00**

5570. 1/4 P.T. ...**LIST EACH, \$6.00**

**DISCOUNT .....40% OFF**

### ALEMITE LUBRICANT



A pure solidified oil. For all industrial service. Contains no acids, grit, or harmful substances. Will lubricate efficiently in temperatures from 30° below to 200° above. Will not cake or gum.

★ **NET EACH CAN**

L-939 1 Pound Can .....**\$0.25**

L-900 5 Pound Can .....**\$1.06**

L-929 10 Pound Can .....**\$1.90**




ALEMITE "PUSH TYPE" SYSTEM

For Automotive and Industrial Lubrication

Push Type Automatic Compressors


These pressure feed Compressors have a primary chamber with a piston that forces the semi-solid lubricant or oil into the secondary chamber where the pressure is developed. By this means there is always lubricant in the nozzle.



6556Z. Capacity 5 ounces. Filled by removing the handle and head assembly.

LIST EACH, \$2.30


- 72 Nozzle Ball .....EACH, \$0.05
- 319 Nozzle Spring .....EACH, \$0.05
- 44033 Piston Main Spring ..EACH, \$0.15



5585Z. Capacity 9 ounces. Filled by removing the handle and head assembly.


LIST EACH, \$4.00

- Z-72 Nozzle Ball .....EACH, \$0.05
- Z-319 Nozzle Spring .....EACH, \$0.05
- Z-405 Main Spring .....EACH, \$0.15

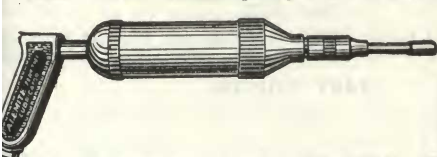

5586. Hydraulic Gun. Operated by pushing the gun coupling on the fitting and working the gun back and forth. The gun is removed from the fitting by a side motion, this simple operation insures rapid work. A positive seal on the fitting is made by the Hydraulic Coupling. The higher the pressure the tighter the jaws of the coupling hold onto the fitting. Operated by one hand, 9 ounce capacity. Inside diameter, 1-29/32 inch, 16 inches overall.

LIST EACH, \$6.30



5256Z. Filled through the handle without removing the head from the cylinder with No. 1010 Push Type Filler Tank. For threshers, combines, tractors and large industrial machines. Sturdy construction. Capacity 1 1/4 pounds.

LIST EACH, \$10.00

5079. With Extension Nozzle....\$10.75

1010 Filler Tank .....\$16.00

P-42440 Main Spring .....\$0.25


Push Type Filler Tank



1010. A portable lubricant container for quickly filling Push Type compressors Z-3-G and 1029. Capacity, 20 pounds of lubricant. Easily carried. Fills a compressor in one or two strokes, remove the plug from the compressor handle and push the handle over the rigid nozzle of the filler tank. With bracket for hanging compressor.

EACH, \$16.00

Hydraulic Type Fittings



- 1610 1/2 inch pipe thread. Straight Fitting. \$0.06
- 1627 1/4 inch pipe thread. Straight Fitting. \$0.14
- 1662 1/2 inch pipe thread. Water Pump Fitting with Cap ..... \$0.14
- 1613 1/2 inch pipe thread. 90° Elbow Fitting ..... \$0.11
- 1611 1/2 inch pipe thread. 30° Elbow Fitting ..... \$0.11
- 1612 1/2 inch pipe thread, 67 1/2° Elbow Fitting ..... \$0.10
- 1629 1/2 inch pipe thread. 67 1/2° Elbow Fitting ..... \$0.18

Push Type Drive Fittings

For converting oil holes into the Push Type Lubricating System by driving an Adapter into the oil hole and then driving in the adapter either an elbow fitting or straight fitting. Adapter drive sizes; 1/8, 1/4, 3/8, 1/2, 5/8, 3/4, 7/8, 1, and 1 1/2 inch.

- 1405 Straight Fitting \$0.07
- 1406 Elbow Fitting \$0.08
- Shouldered Short Adapter \$0.06
- Shouldered Long Adapter \$0.06
- Tapered Long Adapter \$0.07

- 5027 Straight Fitting Drive Tool .....EACH, \$0.50
- 5028 Elbow Fitting Drive Tool .....EACH, \$0.50
- 5026 Adapter Drive Tool .....EACH, \$0.50
- 814 Ring Gauge. For getting adapter size .....\$1.00

ALEMITE "BUTTON HEAD" SYSTEM

For Heavy Industrial Lubrication

Compressors

Use any Alemite In-Type Compressor, see preceding page, but use Button Head Coupling, or Hose with Button Head Coupling and equip machinery with Button Head fittings.

Couplings



Fits any Alemite Hose. Pull-On type.


- With Washer List Each
- 42930 Metal Sealing .....\$2.75
- 42030 Leather .....\$2.75



-41493 Plunger Assembly ...\$0.40

Button Head Hose

- 1145 15 inch heavy duty hose. 1/4 inch connection .....\$6.30



- Double ball jointed hose.
- 5571 1/2 inch connection .....\$8.00
- 5572 3/4 inch connection .....\$8.00


Fittings




- A-1184 1/2 inch Pipe Thread. \$0.12
- A-1186 1/4 inch Pipe Thread. \$0.14
- A-1188 3/8 inch Pipe Thread.. \$0.18

"ALEMITE-DOT" Lubricating System

Compressors have a rigid nozzle and attach directly to the fittings.

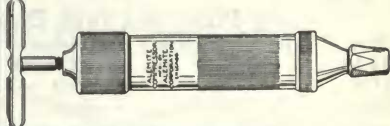

- Capacity Ounces
- No. 5054 8
- 5057 12
- Compressor Large Heavy Duty
- LIST EACH \$5.85 \$8.00

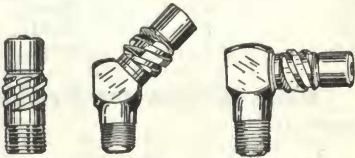

- 1461 1465 1463
- No. 1461 1480 1465 1463
- Fitting Straight Straight Elbow 45° Elbow 90°
- Pipe Thread 1/2 inch 3/4 inch 1/2 inch 3/4 inch
- LIST EACH \$0.12 \$0.25 \$0.24 \$0.24

PRICES, Except 1010 which is List Net .....40% OFF